
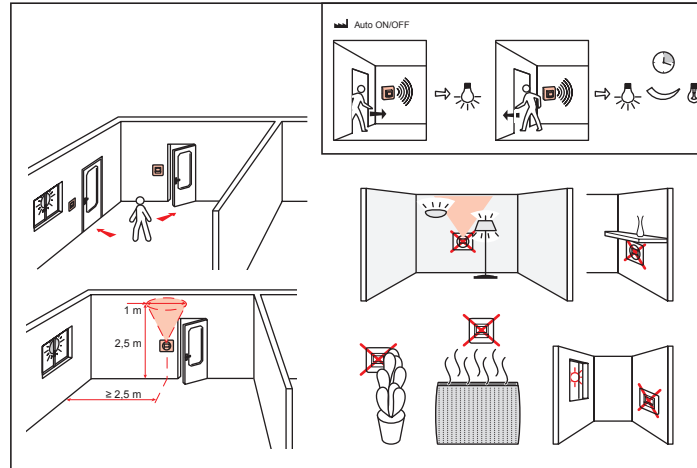
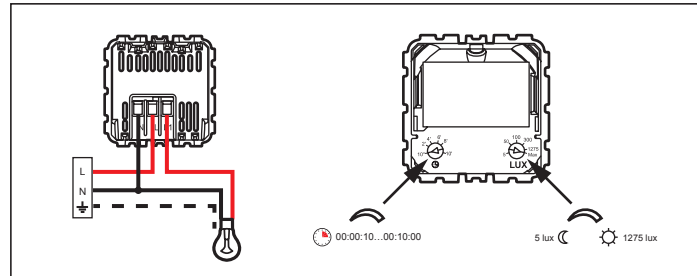


7 527 70, 7 528 70, 7 529 70

|  |  |                         |  |                       |
|--|--|-------------------------|--|-----------------------|
|  |  | 100 - 240 V~            |  | PIR                   |
|  |  | 50 / 60 Hz              |  | 5 ... 1275 lux        |
|  |  | 2 x 2,5 mm <sup>2</sup> |  | 00:00:10 ... 00:10:00 |
|  |  | -5°C ... +45°C          |  | 8 m                   |



|        |               |     |                 |     |                 |     |                 |     |                 |     |                 |       |
|--------|---------------|-----|-----------------|-----|-----------------|-----|-----------------|-----|-----------------|-----|-----------------|-------|
|        |               |     |                 |     |                 |     |                 |     |                 |     |                 |       |
| 110 V~ | 3 W ... 125 W | 1 A | 3 VA ... 125 VA | 1 A | 3 VA ... 125 VA | 1 A | 3 VA ... 125 VA | 1 A | 3 VA ... 125 VA | 1 A | 3 VA ... 125 VA | 1 A   |
| 230 V~ | 3 W ... 350 W | 1 A | 3 VA ... 250 VA | 1 A | 3 VA ... 250 VA | 1 A | 3 VA ... 250 VA | 1 A | 3 VA ... 250 VA | 1 A | 3 W ... 50 W    | 0,4 A |



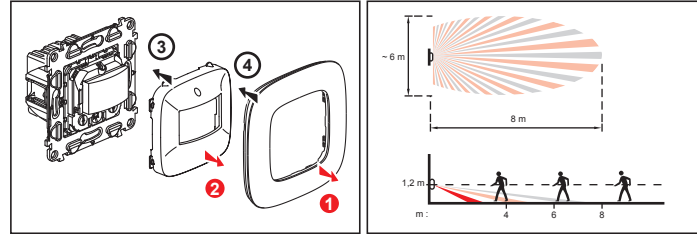


7 527 60, 7 528 60, 7 529 60, 7 529 80

|  |  |                 |  |               |  |       |  |                |  |            |  |                                 |
|--|--|-----------------|--|---------------|--|-------|--|----------------|--|------------|--|---------------------------------|
|  |  | -10°C ... +70°C |  | 0°C ... +35°C |  | 40 mm |  | 100 ... 240 V~ |  | 50 / 60 Hz |  | 8 mm<br>1...2,5 mm <sup>2</sup> |
|--|--|-----------------|--|---------------|--|-------|--|----------------|--|------------|--|---------------------------------|

|                      |           |            |            |            |                    |
|----------------------|-----------|------------|------------|------------|--------------------|
|                      | R         | L          | GL         | Dimmable   | Dimmable LED       |
|                      |           |            |            |            |                    |
| 200-240V~<br>50/60Hz | 5...300 W | 5...300 VA | 5...300 VA | 5...300 VA | 5...75 W<br>≤ 10 x |
| 100-200V~<br>50/60Hz | 5...150 W | 5...150 VA | 5...150 VA | 5...150 VA | 5...37 W<br>≤ 10 x |

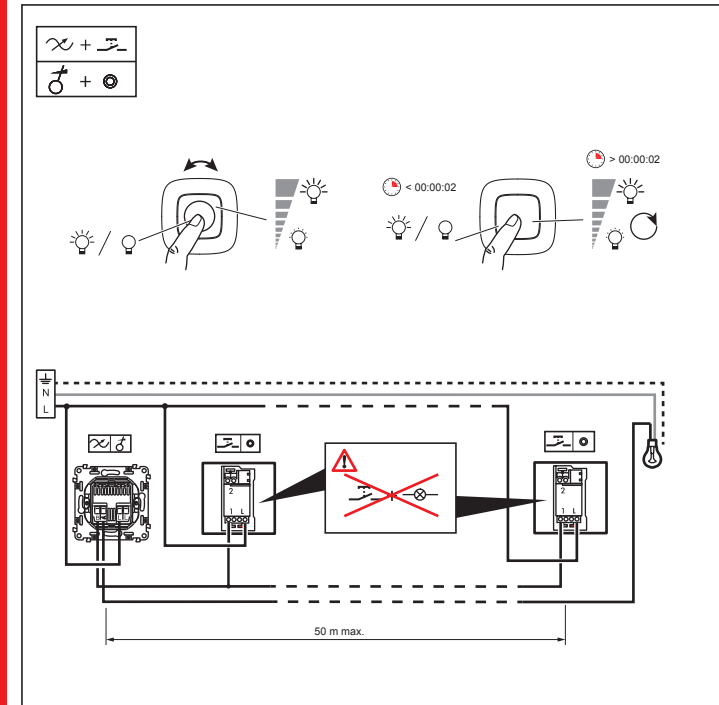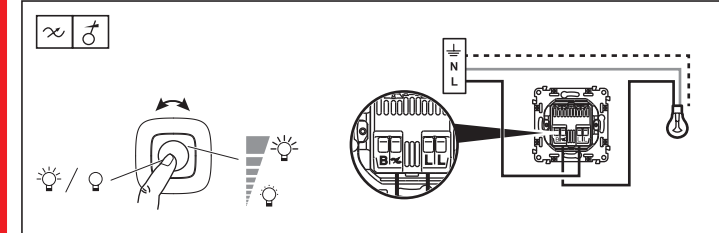

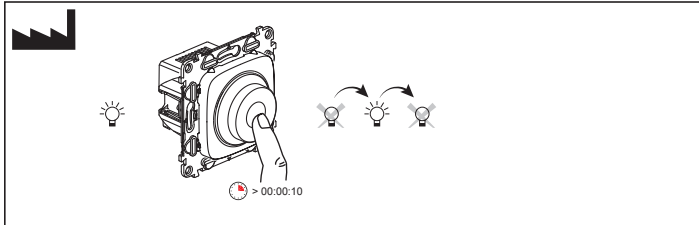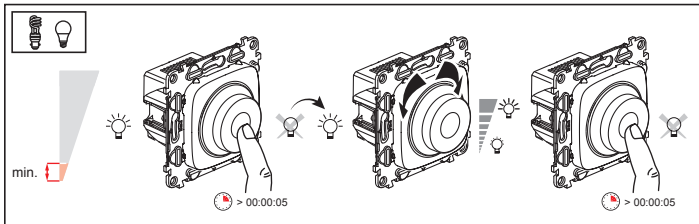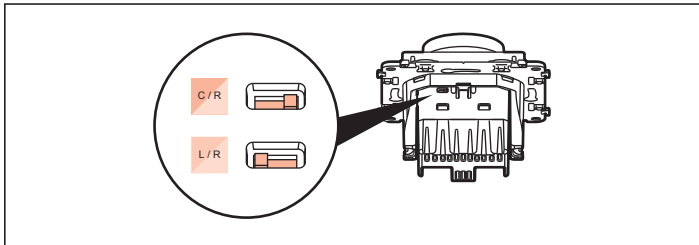

|  |                 |               |       |                              |                                |
|--|-----------------|---------------|-------|------------------------------|--------------------------------|
|  |                 |               |       | U                            |                                |
|  | -10°C ... +75°C | 0°C ... +35°C | 40 mm | 100 ... 240 V~<br>50 / 60 Hz | 8 mm<br>1..2.5 mm <sup>2</sup> |

|               | R                     | L                      | GL                     | Dimmable LED         | Dimmable LED |
|---------------|-----------------------|------------------------|------------------------|----------------------|--------------|
|               |                       |                        |                        |                      |              |
|               |                       |                        |                        |                      |              |
| 240V~<br>50Hz | 3 ... 400 W<br>400 VA | 3 ... 400 VA<br>200 VA | 3 ... 400 VA<br>200 VA | 3 ... 75 W<br>≤ 10 x |              |
| 100V~<br>60Hz | 3 ... 200 W<br>200 VA | 3 ... 200 VA<br>100 VA | 3 ... 200 VA<br>200 VA | 3 ... 37 W<br>≤ 10 x |              |

